


A-A剖面

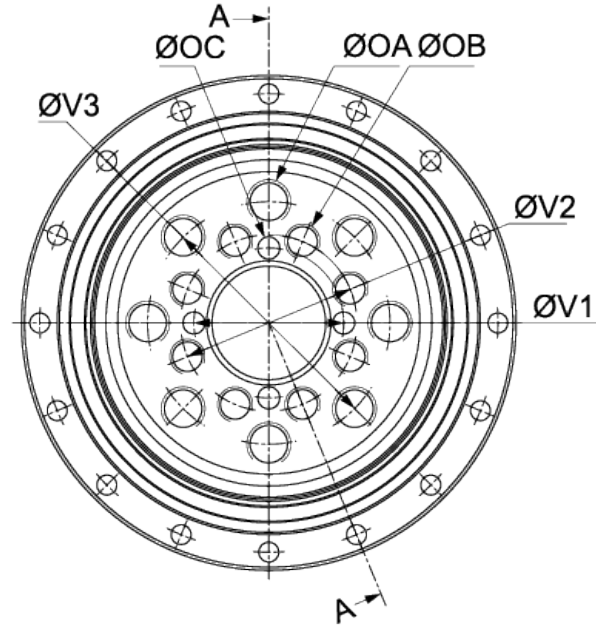

CRBR	Boundary dimensions														
	D	tolerance	d	D1	tolerance	D2	E	F	M	z	I	B	K	L	C
14	55	$\frac{0}{-0.03}$	11	41.8	$\frac{+0.02}{0}$	28	28.4	29.8	13.5	12	16	16.5	2.5	4	0.3
17	62	$\frac{0}{-0.03}$	10	49	$\frac{+0.02}{0}$	34	33.8	36	13.5	12	16	16.5	2.5	4	0.5
20	70	$\frac{0}{-0.03}$	14	56.5	$\frac{+0.02}{0}$	40	40.2	43	13.5	12.5	16	16.5	2.5	4.5	0.7
25	85	$\frac{0}{-0.03}$	20	67	$\frac{+0.02}{0}$	50	52.6	55.3	15	14	18	18.5	2	3.5	1
32	112	$\frac{0}{-0.03}$	26	90	$\frac{+0.03}{0}$	64	68.6	74	18	17	21.6	22.5	3	4.5	1.2
40	126	$\frac{0}{-0.035}$	24-32	105	$\frac{+0.03}{0}$	79	81.2	86	21.5	16.5	22.5	24	2.5	4.5	1.5

CRBR	Boundary dimensions									Mass	Dynamic load rating	Static load rating
	OA	OB	OC		HA	V1	V2	V3	V4	(Kg)	C(N)	C(N)
14	6-M4x0.7P	6-M4x0.7P	3-Ø3	±0.01	8-3.5	15	17	23	49	0.1	4100	4200
17	6-M5x0.8P	6-M5x0.8P	3-Ø3	±0.01	10-3.5	15	19	27	56	0.15	4400	4900
20	8-M6x1P	8-M5x0.8P	4-Ø3	$\frac{+0.02}{0}$	12-3.5	19	24	32	64	0.24	5000	6200
25	8-M8x1.25P	8-M6x1P	4-Ø3	$\frac{+0.02}{0}$	16-3.5	26	30	42	79	0.5	8800	11300
32	8-M10x1.5P	8-M8x1.25P	4-Ø5	±0.03	16-4.5	34	40	55	104	1.24	17100	21800
40	8-M10x1.5P	8-M10x1.5P	4-Ø5	±0.03	20-4.0	42	50	68	117	1.7	19000	26800

Note*: If you need any others size or specification, please do not hesitate to contact *PMI*.