


A-A剖面

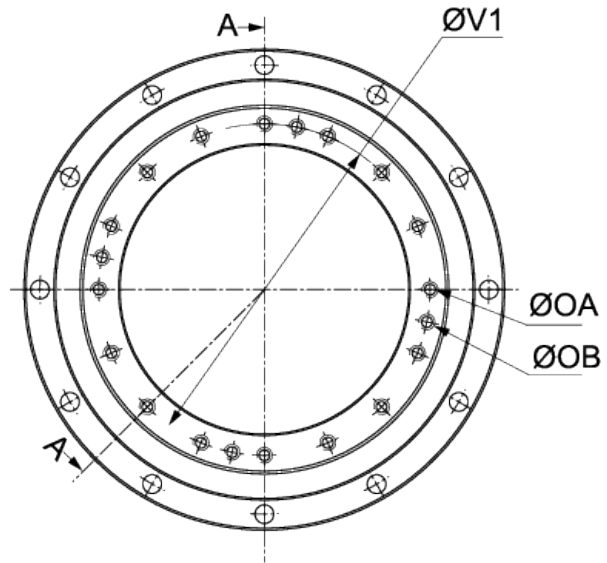

CRBG	Boundary dimensions												
	D	tolerance	d	d1	E	F	M1	M2	I	B	K	L	C
14	70	$\frac{0}{-0.013}$	36 ± 0.05	Ø38	53	57	5	9.6	14.1	15.1 ± 0.05	0.5	1.1	0.5
17	80	$\frac{0}{-0.013}$	45.5 ± 0.05	Ø47	63	68	6.5	9.9	16	17 ± 0.05	0.6	1.1	0.5
20	90	$\frac{0}{-0.015}$	54 ± 0.05	Ø55	72.6	78	8	9.5	17.5	18.5 ± 0.05	1	1.5	0.5
25	110	$\frac{0}{-0.015}$	66 ± 0.05	Ø67	90	94.8	7.5	12.2	18.7	20.7 ± 0.05	1	1.5	1
32	142	$\frac{0}{-0.018}$	84 ± 0.05	Ø88	117.6	123	8	15.4	23.4	24.4 ± 0.05	1	1.5	1.2
40	170	$\frac{0}{-0.02}$	106 ± 0.05	Ø108	142.6	148	9.5	19	29	30 ± 0.05	1.5	1.5	1.5
45	190	$\frac{0}{-0.02}$	118 ± 0.05	Ø120	164	170	9.5	22	32	33 ± 0.05	1.5		2

CRBG	Boundary dimensions						Mass	Dynamic load rating	Static load rating
	OA	OB	HA	HB	V1	V2	(Kg)	C(N)	C(N)
14	12-M3x0.5Px6L	-	8-Ø3.5	2-M3x0.5Px7L	44	64	0.25	7800	9000
17	20-M3x0.5Px6L	-	12-Ø3.5	4-M3x0.5Px10L	54	74	0.34	8700	11000
20	16-M3x0.5Px6L	4-M3x0.5Px6L	12-Ø3.5	4-M3x0.5Px6.5L	62	84	0.44	15600	18200
25	16-M4x0.7Px8L	4-M3x0.5Px6L	12-Ø4.5	4-M3x0.5Px7.5L	77	102	0.73	17400	22500
32	16-M5x0.8Px8L	4-M4x0.7Px8L	12-Ø5.5	4-M4x0.7Px9L	100	132	1.49	33200	46300
40	16-M6x1Px10L	4-M5x0.8Px10L	12-Ø6.6	4-M4x0.7Px11L	122	158	2.62	36200	54900
45	12-M8x1.25Px10L	4-M5x0.8Px10L	12-Ø6.6	4-M4x0.7Px14L	140	180	3.65	39100	63500

Note*: If you need any others size or specification, please do not hesitate to contact *PMI*.